






# ALLIED INSULATED PANELS

PRODUCT DATA SHEET

## COLD PANELS

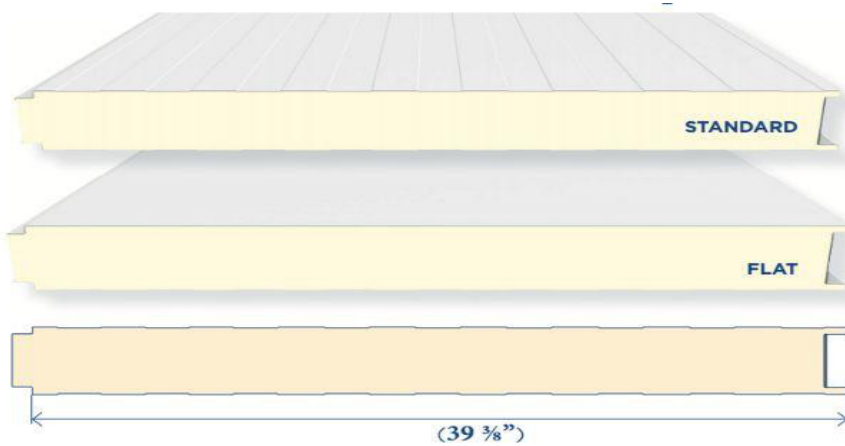

TECHNICAL SPECIFICATIONS							
<b>Panel Thickness</b>	1.5"	2"	2.5"	3"	4"	5"	6"
<b>U - Value</b>	.097	.075	.060	.044	.035	.029	.023
<b>R - Value</b>	10	14	17	23	29	35	44
<b>Useable width</b>	39 3/8 inches						
<b>Length</b>	Up to 39 ft.						
<b>Metal facings</b>	GAUGE 26 / 24 / 22 G-90 galvanized or AZ50 aluminum-zinc						
<b>Coatings</b>	Polyester, PVDF (other coatings available)						
<b>Metal surface</b>	Standard / Flat						
<b>Type of core</b>	Polyisocyanurate (PIR) 2.3 PCF Density						
TEST	TEST METHOD						
<b>Fire</b>	ASTM E 84						
<b>Strength</b>	ASTM E 8						

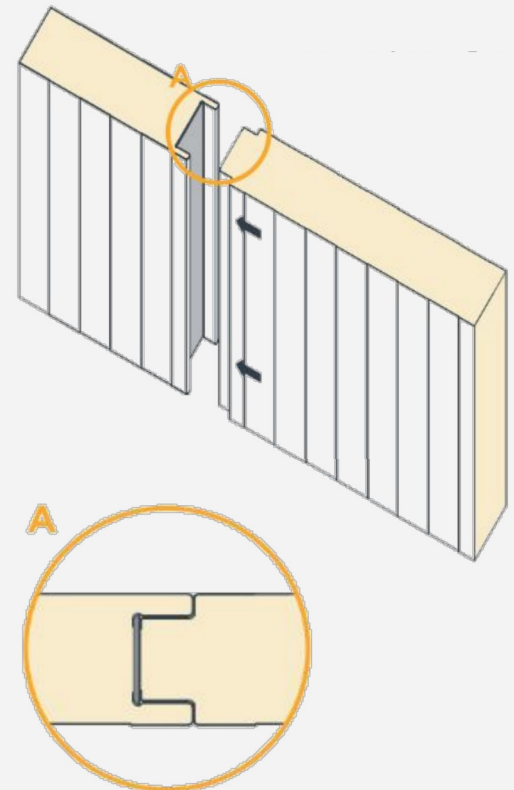

1.800.599.3905



alliedinsulatedpanels.com