




# PRODUCT DATA SHEET

## WALL PANELS

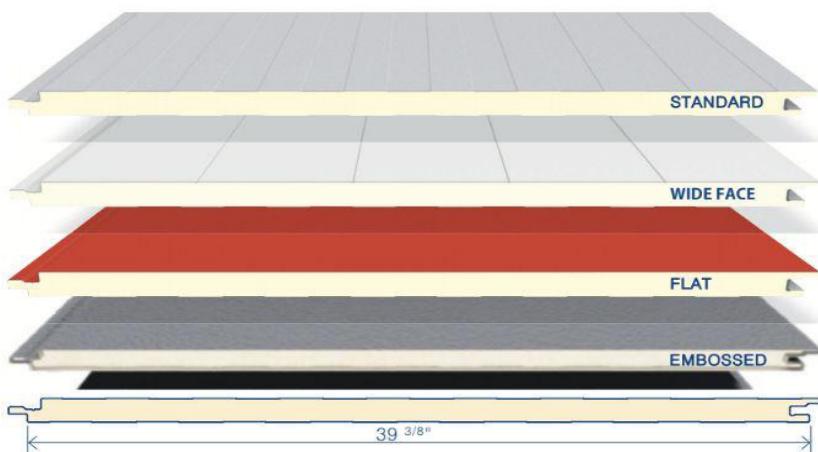

### TECHNICAL SPECIFICATIONS

Panel Thickness	1.5"	2"	2.5"	3"	4"	5"
U - Value	.089	.072	.059	.043	.034	.028
R - Value	11	14	17	23	29	35
Useable width	39 3/8"					
Length	Up to 39 ft.					
Metal facings	GAUGE 26 / 24 / 22 G-90 galvanized or AZ50 aluminum-zinc					
Coatings	Polyester, PVDF (other coatings available)					
Metal surface	Standard / Wide Face / Flat / Embossed					
Type of core	Polyisocyanurate (PIR) 2.3 PCF Density					
TEST	TEST METHOD					
Fire	ASTM E 84					
Strength	ASTM E 8					
Wind Uplift	ASTM E 330					
Water penetration	ASTM E 331					
Permeability	ASTM E 2140					



UNE-EN 13501  
Reaction to fire:  
B-s1, d0

intertek

ASTM E84  
Total Quality. Assured.  
Class A



1.800.599.3905



alliedinsulatedpanels.com